
pag 1/2







design by GIOVANNONI DESIGN

Motorised pedicure station, equipped with 4 motors for seat and backrest position adjustment, shiatsu back massage activation.

Wood-covered frame with rounded edges.

PVC-covered seat: soft touch, fireproof, oil resistant.

Opening armrests for client access and descent.

Tank with Pipe-free jacuzzi system, shower head and chromotherapy. Drains on floor or wall



The information contained in this technical document is correct and accurate to the best of our knowledge, and should therefore be considered reliable. In any case, they cannot imply a guarantee on our part, as certain factors such as the working of the products, are outside our strict control. It is responsibility of the user to verify the suitability of the products for the specific use, as well as the precise and accurate installation in accordance with the guide-lines provided within the instruction manual and according to the current regulation regarding the purpose of the business activity. It should be noted that the packages indicated may vary due to the production efficiency improvement.

This document replaces all previous versions. For further information it is recommended to contact our sales department.






## FOOT BASIC M.F. CHAIR N89922

Pedicure unit: metal structure covered in PVC; soft touch, fireproof, oil resistant. Manual adjustment: sliding seat adjustments. Rotating armrests for easier Client's in-out, adjustable footrest. Basin equipped with shower







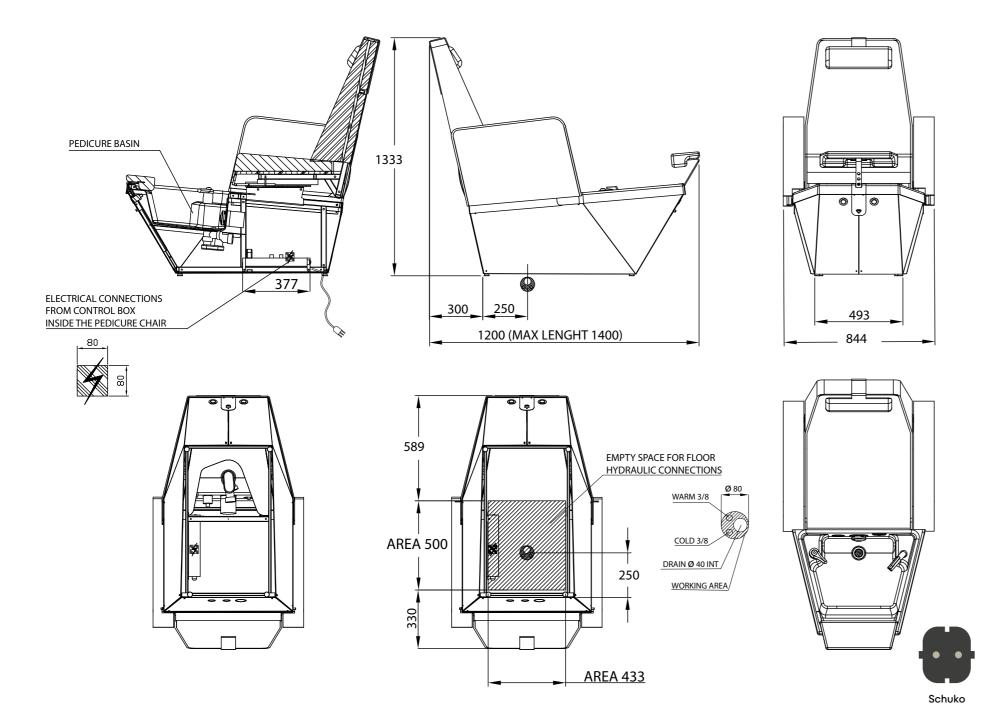

NILO S.r.I. Via Armani 42019 Sca		□ <b>( €</b>
Mod : Foot Basic - N8992 PEDICURE CHAIR		92
MADE IN I	TALY	
110 V	50 / 60 Hz	100 W





			I	
	_	1	•	•

U.K.



	c	٨
u	.Э	.А

PACKAGING

TECHNICAL SPECIFICATION	YES	NO	
TYPE	MANUAL		
INTEGRATED PEDICURE BASIN	*		
PIPELESS	*		
FOOTREST	*		
RECLINING		*	
ARMRESTS FEATURES	ROTATING ARMRESTS		
BACKREST MASSAGE		*	
CAVE LENGHT	1.7 M		
UPHOLSTERY	SKAY PVC NILO		

OPTIONAL	YES	NO
HEATING SYSTEM		*
MEMORY FOAM		*
FACE HOLE		*
PAPER HOLDER		*
FOOT-CONTROL SET-UP		*
FOOT-CONTROL		*
HYDRO (PIPE-FREE) + RGB-LED LIGHT	*	
FLOOR DRAINAGE PUMP	STANDARD EQUIPMENT	
WALL DRAINAGE PUMP	*	
HEADREST PILLOW	STANDARD EQUIPMENT	
WHEELS		*
110 VOLT	*	

VERSION	YES	NO
MANUAL	STANDARD VERSION	
ELETTRIC	HYDRO + RGB VERSION	

ELETTRIC		
VOLT	220V/240V (ACHIEVABLE 110 V)	
ABSORPTION	100 W	
SOCKET	SCHUKO/UK/USA	
MEACHDEMENT		
MEASUREMENT		
MAXIMUM LOAD CAPACITY	140 KG	
MEASUREMENTS	→ 140/120 5 84 ↑ 133 CM - 80 KG	

SEY C

 $PALLET \rightarrow 94 \nwarrow 164 \uparrow 164 \ CM - 105 \ KG$