
pag 1/2







design by ALBERTO APOSTOLI

Multi-purpose bed with 4 motors, for face, body and massage treatments
Electrical height, backrest and leg rest adjustment.

Mattress covered in oil- and fire-resistant PVC.

Folding arm rests with gas-pump.

Painted base with RGB LED lighting under the base.

Columns covered in fumé plexiglass



The information contained in this technical document is correct and accurate to the best of our knowledge, and should therefore be considered reliable. In any case, they cannot imply a guarantee on our part, as certain factors such as the working of the products, are outside our strict control. It is responsibility of the user to verify the suitability of the products for the specific use, as well as the precise and accurate installation in accordance with the guide-lines provided within the instruction manual and according to the current regulation regarding the purpose of the business activity. It should be noted that the packages indicated may vary due to the production efficiency improvement.

This document replaces all previous versions. For further information it is recommended to contact our sales department.



4 MOTORS

2300 MM

SKAY PVC NILO

↑57/77

110 V/240 V MULTI VOLTAGE

200 W / 350 W THERMIC

SCHUKO/UK/USA

WHITE LED INCLUDED

NO

NOT AVAILABLE

YES

YES

AVAILABLE



SENSUS BED N9032 | N9032T

Electric bed, with mattress covered in oil- and fire-resistant PVC, with gas-pump adjustable armrests, RGB LED light around the base



BED TYPE

CAVE LENGHT

UPHOLSTERY

MANUAL

ELECTRIC

VOLT

SOCKET

THERMIC

KNEE ROLL TERRY COVER FOOT CONTROL

KIT LED

DREST

ARMRESTS

LAMP HOLDER

ADJUSTABLE ARMRESTS

REMOVABLE ARMRESTS

ADJUSTABLE ARMRESTS + RECLINING HEA-

ADJUSTABLE, ROTATING, AND REMOVABLE

ADJUSTABLE, ROTATING, AND REMOVABLE

ARMRESTS + RECLINING HEADREST

MEMORY FOAM PAPER HOLDER

ABSORPTION


ELEVATION RANGE





TECHNICAL SPECIFICATION

THERMIC COVER INSPECTION

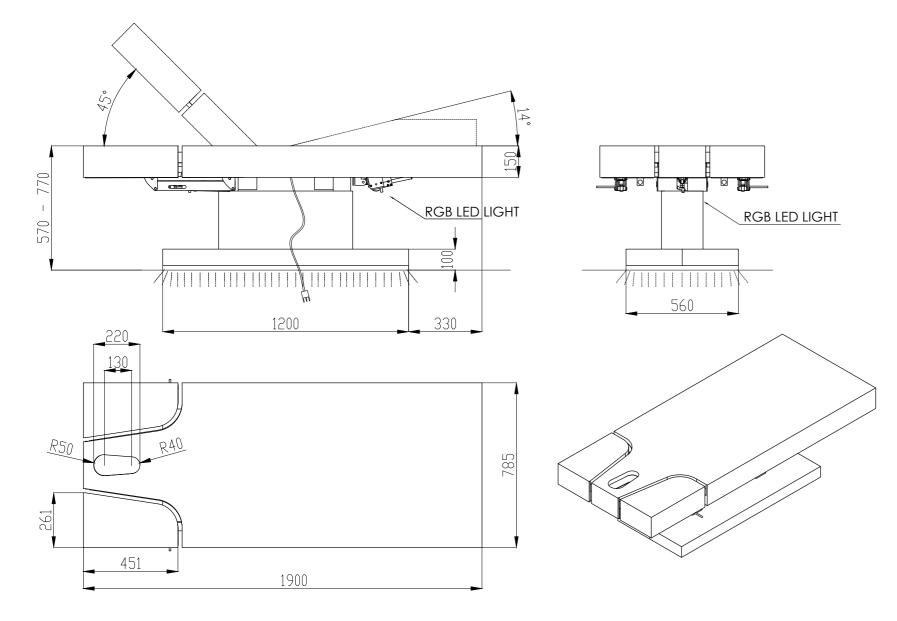



	_	
	•	

U.K.

(€



U.S.A.

	П	
•	-	

MEASUREMENTS	
MAXIMUM LOAD CAPACITY	200 KG
MEASUREMENTS	→ 190 < 79 ↑ 57/77 CM - 110 KG
PACKAGING	PALLET → 220 < 92 ↑ 80 CM - 155 KG



_			
		•	
			_
	_		_



110/240 V 50 - 60 Hz 200 Watt

Piazzale G. Maletti,1

NILO SRL

Piazzale G 42019 Sca	5. Maletti,1 andiano (RE)	- Italy
Lettino S	ensus termic	o N9032T
Data	Ma	tr. 2024
	Made In Ital	у
110/240 V	50 - 60 Hz	350 Watt

NILO SRL

(€